


Multipoint Temperature Controller

E5ZE-8□□□D1□B-V2

Multipoint Temperature Controller Connects to the Programmable Controller with Ease

- Conforms to DeviceNet requirements with remote I/O and FINS message communications, thus connecting to a CompoBus/D Master without programs for remote I/O communications and to OMRON's Programmable Controller with ease for explicit message communications.
- High-speed input sampling of only 0.2 s at the maximum of eight temperature inputs.

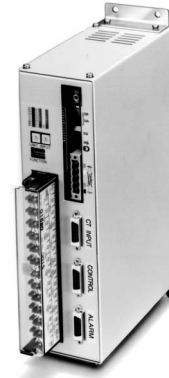

Model Number Structure

■ Model Number Legend

E5ZE-8□□□D1□B-V2
 1 2 3 4 5 6 7 8

1. Number of Control Points

8: 8 channels

2. Control Method

A: Standard (heating or cooling)

V: Heating and cooling

3. Control Output (Heating Side)

Q: Voltage output (for driving SSR)

C: Current output

4. Heater Burnout and SSR Failure Detection (See note 1.)

H: Available

A: Not available

5. Communications Function

D1: DeviceNet

6. Input

TC: Thermocouple

P: Platinum resistance thermometer

7. Case

B: Provided (Models with case)

8. Version

V2: Supports explicit messages

- Note:** 1. Heater burnout and SSR failure detection are not available when the control output on the heating side is current output.
 2. Refer to the *List of Models* for combinations of functions.

Ordering Information

■ List of Models

No. of control points	Control method	Control output	Heater burnout and SSR failure detection	Input type	
				Thermocouple	Platinum resistance thermometer
8	Standard (see note 1)	Voltage	Available (see note 2)	E5ZE-8AQHD1TCB-V2	E5ZE-8AQHD1PB-V2
		Current	Not available	E5ZE-8ACAD1TCB-V2	E5ZE-8ACAD1PB-V2
	Heating and cooling	Voltage	Available (see note 2)	E5ZE-8VQHD1TCB-V2	E5ZE-8VQHD1PB-V2
		Current (see note 3)	Not available	E5ZE-8VCAD1TCB-V2	E5ZE-8VCAD1PB-V2

- Note:** 1. Cooling control is possible by making a change in output operation.
 2. Models without the heater burnout/SSR failure detection function are also available.
 3. Cooling control output is an open collector output (NPN).

■ Accessories (Order Separately)

Setting Display Unit

Connecting model	Connecting part	Power supply	Model
RS-232C	Connector	100 to 240 VAC 24 VDC	E5ZD-SDL1

Note: Not all the functions of the E5ZE can be set, which should be taken into consideration when designing the system. For details, refer to the *E5ZD-SDL Setting Display Unit Datasheet (H061)*.

Current Transformers (CT)

Hole diameter	5.8 mm	12.0 mm
Model	E54-CT1	E54-CT3

Special Cables

Model
E5ZE-CBL200
ES100-CT021-202 (25-pin)
ES100-CT023-202 (9-pin)

Recommended Power Supplies

Series
S82J
S82K

Specifications

■ Ratings

Supply voltage		24 VDC
Operating voltage range		85% to 110% of rated supply voltage
Power consumption		15 W + 20% max. at rated supply voltage
Input	Input type	Thermocouple: K, J, R, S, T, E, B, N, L, U, W, PL-II Platinum resistance thermometer: Pt100, JPt100
	Input impedance	Thermocouple: 1 MΩ min.
	Rated platinum resistance thermometer current	1 mA
Control outputs	Standard (Heating side)	Voltage output (with short-circuit protecting function) ON: 12 ± 1.2 VDC OFF: 0.5 VDC max. Max. load current: 30 mA DC per point Current output Rated output range: 4 to 20 mA DC Current output range: 0 to 22 mA DC With an output value of 0%: 4 ⁺⁰ / _{-0.6} mA DC With an output value of 100%: 20 ⁺² / ₋₀ mA DC Max. load resistance: 600 Ω per point
	Cooling side	Open collector output (NPN) Max. applied voltage: 30 VDC Max. load current: 50 mA DC per point ON residual voltage: 2 VDC max. OFF leakage current: 1 mA DC max.
Alarm outputs		Temperature alarm: The total output of all control points (alarm 1 NPN open collector output and alarm 2 NPN open collector output) HB alarm (heater burnout detection): Total output of all control points (1-point NPN open collector output) HS alarm (SSR failure detection): Total output of all control points (1-point NPN open collector output) Temperature controller error output (memory, set value, or hardware error): 1-point NPN open collector output Max. applied voltage: 30 VDC Max. load current: 50 mA DC per point
No. of input control points		8 input and 8 control points
Setting method		Via communication
Control modes		ON/OFF control Hybrid of advanced PID control and fuzzy control Manual operation
Memory bank input		No. of points: 8 for each control point Designation method: Through communication or memory bank designation input
Memory bank designation inputs		With contact signal input ON short-circuit resistance: 1 kΩ max. OFF open resistance: 100 kΩ min. With no-contact signal input ON residual voltage: 2 VDC max. OFF leakage current: 1 mA DC max.

Input Ranges

Thermocouple

Input (switch selectable)	K (CA) Chromel vs. alumel (see note 1)	J (IC) Iron vs. constantan	R Platinum vs. Platinum rhodium 13%	S Platinum vs. Platinum rhodium 10%	T (CC)/U Copper vs. constantan	E (CRC) Chromel vs. constantan	B Platinum rhodium 30% vs. platinum rhodium 6%	N Nichrosil vs. nilsil	L Iron vs. constantan	U Copper vs. constantan	W (see note 2)	PL-II (Platinum)	
Range	°C	-200 to 1,300	-100 to 850	0 to 1,700	0 to 1,700	-200 to 400	0 to 600	100 to 1,800	0 to 1,300	-100 to 850	-200 to 400	0 to 2,300	0 to 1,300
	°F	-300 to 2,300	-100 to 1500	0 to 3,000	0 to 3,000	-300 to 700	0 to 1100	300 to 3,000	0 to 2,300	-100 to 1,500	-300 to 700	32 to 4,100	0 to 2,300
Setting no.	0	1	2	3	4	5	6	7	8	9	A	B	
Min. setting unit	1°C or 0.1°C												

Platinum Resistance Thermometer

Input (switch selectable)	Pt 100 (see note 1)	JPt 100	
Range	°C	-100.0 to 500.0	-100.0 to 500.0
	°F	-100.0 to 900.0	-100.0 to 900.0
Setting no.	0	1	
Min. setting unit	1°C or 0.1°C		

Note: 1. A temperature range is factory-set to a range of -200° to 1,300°C (for K(CA)) or -100.0° to 500.0°C (for Pt 100).

2. Thermocouple W is W/Re5-26 (tungsten rhenium 5, tungsten rhenium 26).

Characteristics

Measurement accuracy (see note)	Thermocouple: (±0.3% of the process value or ±2°C, whichever greater) ±1 digit max. (±0.3% of the process value or ±3.6°F, whichever greater) ±1 digit max. Platinum resistance thermometer: (±0.3% of the process value or ±0.8°C, whichever greater) ±1 digit max. (±0.3% of the process value or ±1.5°F, whichever greater) ±1 digit max.
Hysteresis	0.0° to 99.9°C/°F for ON/OFF control only (in units of 0.1°C/°F)
Cooling coefficient	0.0 to 10.0 (in units of 0.1)
Proportional band	0.0° to 999.9°C/°F (in units of 0.1°C/°F) Cooling side: Cooling coefficient × Proportional band
Integral (reset) time	0 to 3,999 s (in units of 1 s) (for both heating and cooling)
Derivative (rate) time	0 to 3,999 s (in units of 1 s) (for both heating and cooling)
Control period	Heating side: 1 to 99 s (in units of 1 s) Cooling side: 1 to 99 s (in units of 1 s)
Sampling period	200 ms for 8 control points
Dead band/overlap band	-999° to 999°C/°F (in units of 1°C/°F)
Alarm output setting range	-999° to 9999°C/°F, 0 to 9999°C/°F (upper- and lower-limit alarm) (in units of 1°C/°F) -999.9° to 9999.9°C/°F, 0.0 to 9999.9°C/°F (upper- and lower-limit alarm) (in units of 0.1°C/°F) (see note 3)
Fuzzy strength	0% to 99% (in units of 1%)
Fuzzy scale 1	0.2° to 999.9°C/°F (in units of 0.1°C/°F)
Fuzzy scale 2	0.02° to 99.99°C/s or °F/s (in units of 0.01°C/s or °F/s)
Set value backup	Lithium battery
Set value backup period	10 years min. provided that the ambient temperature is within the room temperature
Insulation resistance	20 MΩ min. between the FG terminal and all analog input terminals (at 500 VDC)
Dielectric strength	A leakage current of 1 mA AC max. with 500 VAC for 1 minutes between the FG terminal and all analog input terminals
Vibration resistance	Malfunction: 10 to 55 Hz, 15 m/s ² for 8 min each in X, Y, and Z directions Destruction: 10 to 55 Hz, 20 m/s ² for 8 min each in X, Y, and Z directions
Shock resistance	Malfunction: 150 m/s ² , 3 times each in 6 directions Destruction: 200 m/s ² , 3 times each in 6 directions
Ambient temperature	Operating: 0° to 55°C (with no icing or condensation) Storage: -25° to 65°C (with no icing or condensation)
Ambient humidity	Operating: 35% to 85% Storage: 35% to 95%

Dimensions	With casing: 173.5 x 253 x 65 mm max.
Enclosure rating	IP00
Weight	With casing: 1,700 g max.

- Note:** 1. The measurement accuracy of the E5ZE used with a thermocouple B at 400°C or 750°F max. is not guaranteed. The following measurement accuracy values are applied to the E5ZE.
- | | |
|---|----------------------|
| K and T at -100°C max. and U: | ±3°C ±1 digit max. |
| K and T at -100°F max. and U: | ±5.4°F ±1 digit max. |
| R, S, and W at 200°C max., and B at 1,000°C max.: | ±4°C ±1 digit max. |
| R, S, and W at 400°F max., and B at 1,800°F max.: | ±7.2°F ±1 digit max. |
2. The measurement accuracy of the E5ZE used with any thermocouple is 1°C/°F. The thermocouple can be used under the following temperature ranges to increase the measurement accuracy to as high as 0.1°C/°F.
- | | |
|--------------------------------|--|
| K thermocouple: | 0.0 °C to 1,300.0 °C, 0.0 °F to 2,300.0 °F |
| T or U thermocouple: | 0.0 °C to 400.0 °C, 0.0 °F to 700.0 °F |
| N thermocouple: | 400.0 °C to 1,300.0 °C, 700.0 °F to 2,300.0 °F |
| J, E, L, or PLII thermocouple: | Any temperature |
3. Upper limit is 3000.0°C/°F when set from CompoBus/D.

■ Communications Specifications

Conforming to DeviceNet Communications Protocol

For details, refer to the *CompoBus/D (DeviceNet) Operation Manual (W267)* and the *E5ZE-8 Communication Manual (H114)*.

Connection method	Multi-drop or T-branching (see note 1)			
Baud rate	500/250/125 kbps			
Communications media	Dedicated 5-wire cable (with 2 communications wires, 2 power wires, and 1 shield wire)			
Communications distance	Baud rate	Maximum network length (see note 2)	Branch line length	Total branch line length
	500 kbps	100 m max. (see note 3)	6 m max.	39 m max.
	250 kbps	250 m max. (see note 3)	6 m max.	78 m max.
	125 kbps	500 m max. (see note 3)	6 m max.	156 m max.
Remote I/O points	IN: 14 / OUT: 9			
Error control	CRC error and node address duplication check			

- Note:** 1. An external terminator must be attached.
 2. Indicates the distance between nodes farthest from each other.
 3. The maximum network length is 100 m if a thin dedicated cable is applied to the trunk line.

⚠ NOTICE


This product has been tested by ODVA's authorized Independent Test Lab and found to comply with ODVA Conformance Test Software Version A-13.
 For the specifications of objects in details, refer to the *E5ZE-8 Communication Manual (H114)*.

DeviceNet Communications Items

Remote I/O communications	IN: PV (process value) (8 points), Alarms 1 and 2 status, AT status, HB alarm status, HS alarm status, and error status OUT: RUN/STOP and SP (set point) (8 points)
Explicit message communications	All read and write parameters (See note.)

Note: Items for the OUT side of remote I/O are not included.

System Configuration


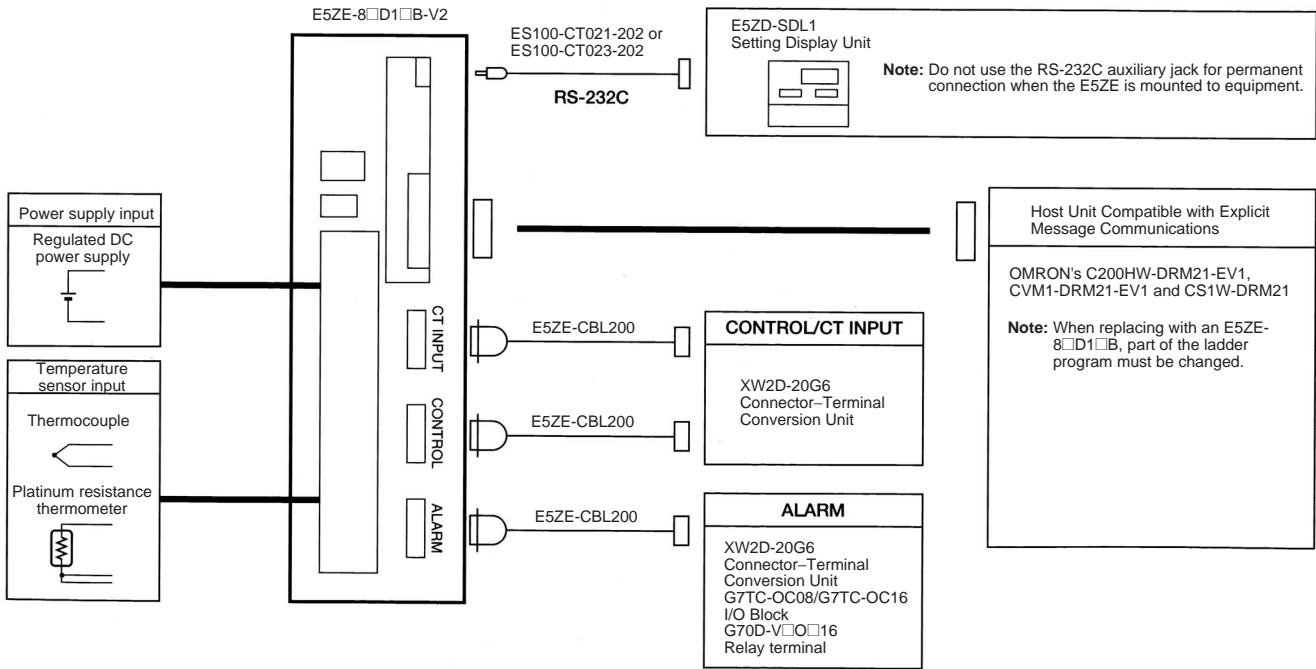


Caution
 Be sure to use the above Units, which save wiring effort, and connection cables for the prevention of malfunctions or accidents that may be caused by mistakes in wiring.

Dimensions

Note: All units are in millimeters unless otherwise indicated.

E5ZE-8□D1-□B-V2

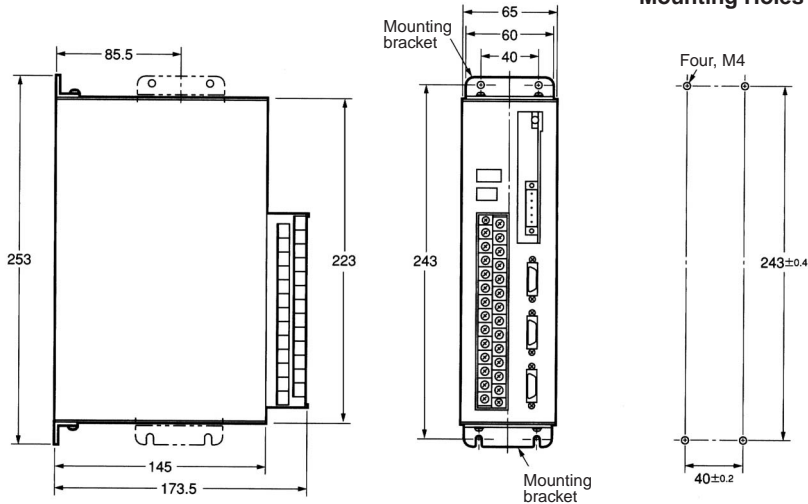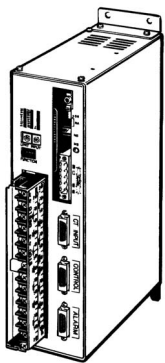


Precautions

Mounting the Controllers


Side-by-side, Close Mounting

Saves space and improves wiring efficiency.



Wall Mounting

Can be mounted to places with limited depth.



General Mounting Precautions


The side of the E5ZE with the terminal block and connectors must not face up, otherwise operating errors may result.

Prepare four M4 screws to mount the E5ZE to control panels. Use flat washers and spring washers with screws to mount the E5ZE to control panels so that the screws will not loosen.

The mounting brackets must be attached to the E5ZE with the four M3×6 screws provided with the E5ZE and each of the screws should be tightened to a torque of 0.43 to 0.58 N·m, or 4.4 to 5.9 kgf·cm.

Do not mount as shown in the following diagram.

Incorrect

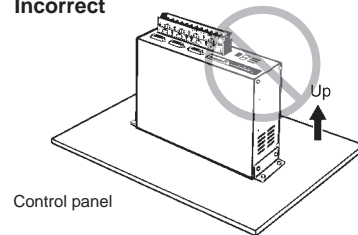

Warranty and Limitations of Liability

■ WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

■ LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS, OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

Application Considerations

■ SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products.

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. H103-E1-02 **In the interest of product improvement, specifications are subject to change without notice.**

OMRON Corporation

Industrial Automation Company

Industrial Devices and Components Division H.Q.

Measuring Components Department

Shiokoji Horikawa, Shimogyo-ku,

Kyoto, 600-8530 Japan

Tel: (81)75-344-7080/Fax: (81)75-344-7189

Printed in Japan

0703-0.3M (1098) (A)