


Touch panel monitor for FHV7 Smart Camera

PPC-3100S-OMR

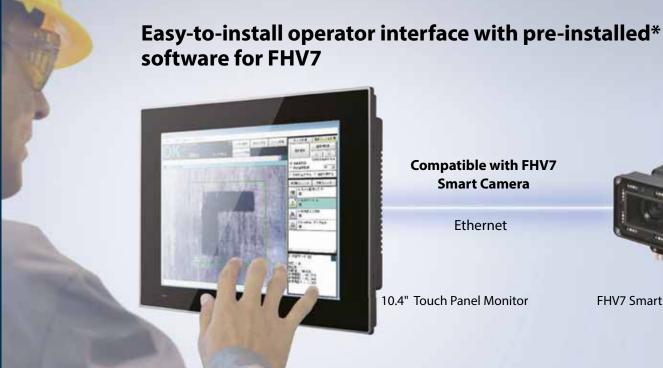

Compatible with FHV7 Smart Camera

Ethernet



10.4" Touch Panel Monitor

FHV7 Smart Camera

* Additional software installation may be required depending on the software version of the smart camera.

Specifications

| LCD | Display Type | 10.4" TFT LCD (LED backlight) |
|------------------------|---------------------------|---|
| | Resolution | 1024×768 |
| | Luminance | 350 cd/m ² |
| | Contrast Ratio | 1200 |
| | Backlight Lifetime | 30,000 hr (min.) |
| | Touch Type | Capacitive |
| External Interface | Ethernet | 10/100/1000 Mbps Ethernet × 2 |
| | USB I/F | USB 2.0×1 USB 3.0×1 |
| Power Consumption | Input Voltage | 12 to 24 VDC |
| | Power Consumption | 16 W |
| Environment | Ambient Temperature Range | Operating: 0 to 50°C Storage: −40 to 60°C |
| | Ambient Humidity Range | 10% to 95% at 40°C (With no condensation) |
| | Vibration | Operating Random Vibration Test 5 to 500 Hz, 2 Grms, follow IEC 60068-2-64 |
| | Shock | Operating 10 G peak acceleration (11 ms duration), follow IEC 60068-2-27 |
| | EMC | CE, FCC Class B, BSMI |
| | Safety | CB, CCC, BSMI, UL |
| Dimensions | | 272×217×46 mm |
| Weight | | 1.9 kg |
| Front Panel Protection | | IP65 compliant |
| Mounting | | Panel mount, Wall mount, VESA Standard |
| Accessories | | Instruction sheet, Connector for power supply, Mounting screws and brackets for panel mount, Recovery software CD |




(Unit:mm)

Accessories (Sold Separately)


| Item | Model |
|---|-------------------|
| ARM VESA Standard (A-CLEVER) for PPC Series | PPC-ARM-A03 |
| Wall mount kit for PPC Series | PPC-174T-WL-MTE |
| Stand for PPC Series | PPC-Stand-A1E |
| ADP A/D 100-240V 90W 19V W/PFC | 96PSA-A90W190T-1 |
| Power cord 3P UL 10 A 125 V 1.8 m | 1700001524 |
| Power cord 3P Europe (WS-010+083) 1.83 m | 170203183C |
| Power cord 3P/3P PSE 1.8 m | 1700008921 |
| Power cord 3P CCC (China) 1.8 m | 96CB-POWER-B-1.8M |


I/O View



D. RS-232/422/485 A. Power switch B. DC-In E. RJ45LAN×2 **C**. RS-232 F. USB 2.0 x 1, USB 3.0 x 1

Dimensions

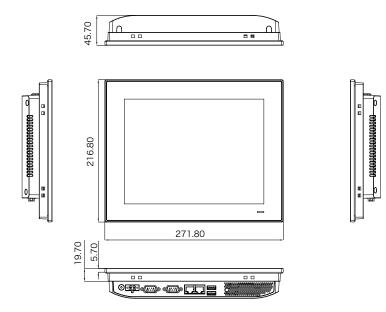



Panel Cutout Dimensions: 265 x 210 mm

 $\bullet Company names and product names in this document are the trademarks or registered trademarks of their respective companies.\\$

Would you like to know more? OMRON EUROPE



2 +31 (0) 23 568 13 00



^{*} The serial ports C and D are not used when the PPC-3100S-OMR is used as an operator interface.