


Photomicrosensor (Actuator Mounted) EE-SA107-P2


⚠ Be sure to read *Precautions* on page 24.

■ Dimensions

Note: All units are in millimeters unless otherwise indicated.

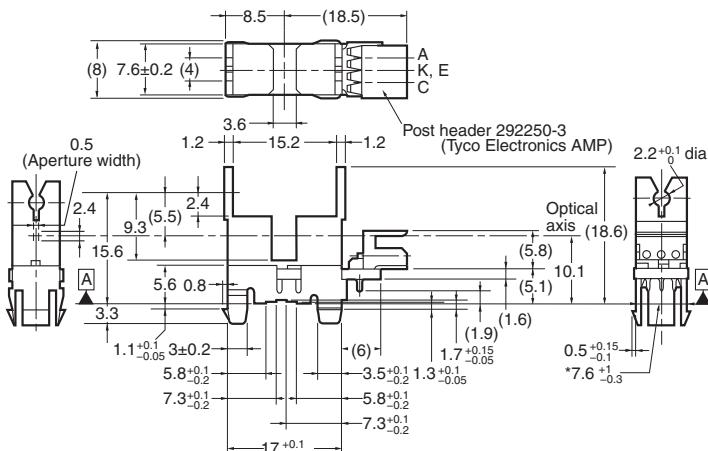

Internal Circuit



Note: The asterisked dimension is specified by datum A only.

Unless otherwise specified, the tolerances are as shown below.

Dimensions	Tolerance
3 mm max.	± 0.3
3 < mm \leq 6	± 0.375
6 < mm \leq 10	± 0.45
10 < mm \leq 18	± 0.55
18 < mm \leq 30	± 0.65

Terminal No.	Name
A	Anode
K	Cathode
C	Collector
E	Emitter

Recommended Mating Connectors:

Tyco Electronics AMP 179228-3 (crimp connector)
173977-3 (press-fit connector)
175778-3 (crimp connector)

■ Features

- An actuator can be attached.
- Snap-in mounting model.
- Mounts to 1.0-, 1.2- and 1.6-mm-thick PCBs.
- Connects to Tyco Electronics AMP's CT-series connectors.

■ Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

	Item	Symbol	Rated value
Emitter	Forward current	I_F	50 mA (see note)
	Pulse forward current	I_{FP}	---
	Reverse voltage	V_R	4 V
Detector	Collector-Emitter voltage	V_{CEO}	30 V
	Emitter-Collector voltage	V_{ECO}	5 V
	Collector current	I_C	20 mA
	Collector dissipation	P_C	100 mW (see note)
Ambient temperature	Operating	T_{opr}	-25°C to 85°C
	Storage	T_{stg}	-40°C to 85°C
Soldering temperature		T_{sol}	---


Note: Refer to the temperature rating chart if the ambient temperature exceeds 25°C.

■ Electrical and Optical Characteristics ($T_a = 25^\circ\text{C}$)


	Item	Symbol	Value	Condition
Emitter	Forward voltage	V_F	1.2 V typ., 1.5 V max.	$I_F = 30 \text{ mA}$
	Reverse current	I_R	0.01 μA typ., 10 μA max.	$V_R = 4 \text{ V}$
	Peak emission wavelength	λ_P	940 nm typ.	$I_F = 30 \text{ mA}$
Detector	Light current	I_L	0.5 mA min., 14 mA max.	$I_F = 20 \text{ mA}, V_{CE} = 5 \text{ V}$
	Dark current	I_D	200 nA max.	$V_{CE} = 10 \text{ V}, 0 \text{ lux}$
	Leakage current	I_{LEAK}	---	---
	Collector-Emitter saturated voltage	$V_{CE} (\text{sat})$	0.1 V typ., 0.4 V max.	$I_F = 20 \text{ mA}, I_L = 0.3 \text{ mA}$
	Peak spectral sensitivity wavelength	λ_P	850 nm typ.	$V_{CE} = 5 \text{ V}$
Rising time	t_r		8 μs typ.	$V_{CC} = 5 \text{ V}, R_L = 100 \Omega, I_L = 1 \text{ mA}$
Falling time	t_f		8 μs typ.	$V_{CC} = 5 \text{ V}, R_L = 100 \Omega, I_L = 1 \text{ mA}$

■ Engineering Data


Forward Current vs. Collector Dissipation Temperature Rating

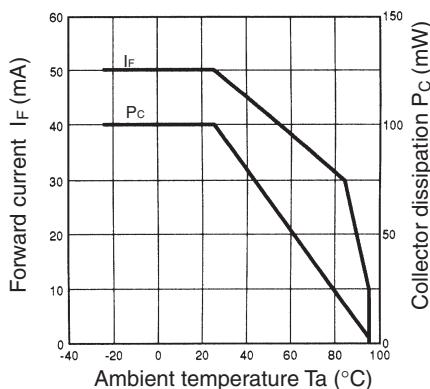


Light Current vs. Collector-Emitter Voltage Characteristics (Typical)

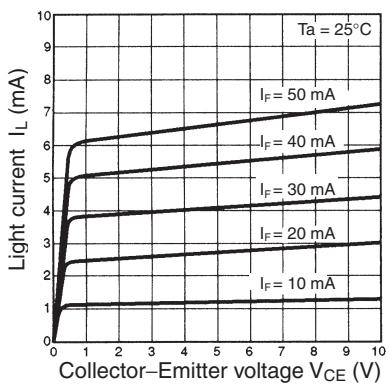


Response Time vs. Load Resistance Characteristics (Typical)

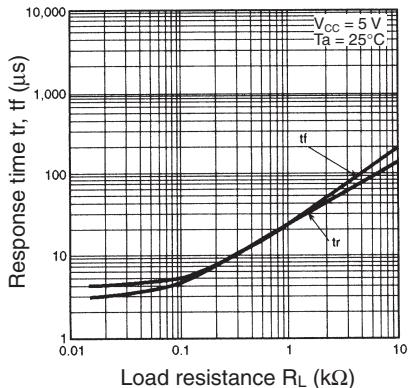


Response Time Measurement Circuit

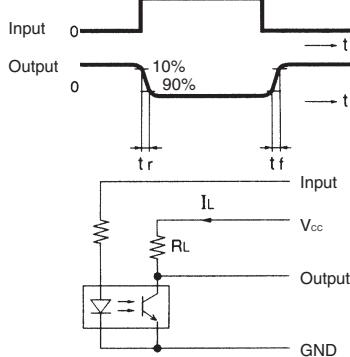


Forward Current vs. Forward Voltage Characteristics (Typical)

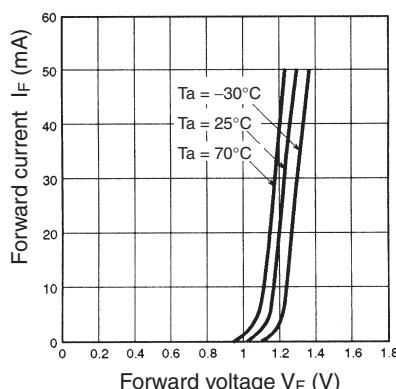


Light Current vs. Forward Current Characteristics (Typical)

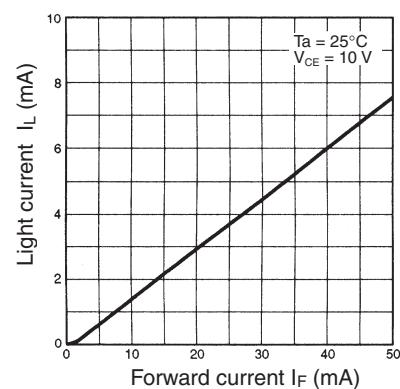


Dark Current vs. Ambient Temperature Characteristics (Typical)

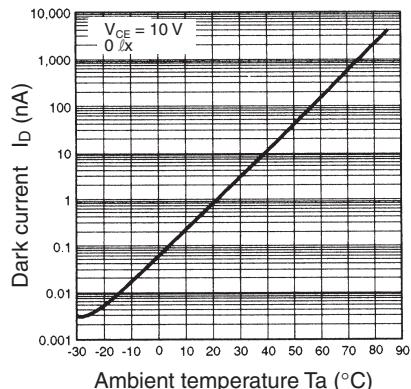


Relative Light Current vs. Ambient Temperature Characteristics (Typical)

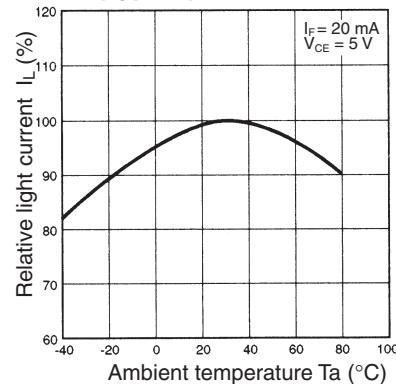

Sensing Position Characteristics (Typical)

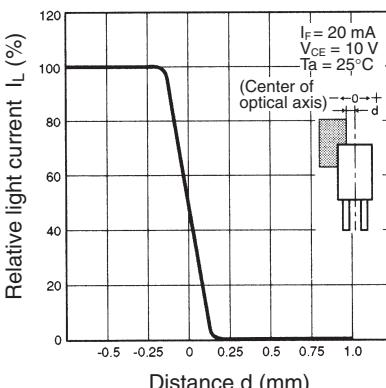

Sensing Position Characteristics (Typical)

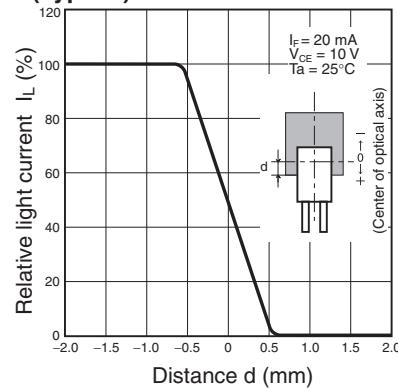

Actuator Dimensions



Note: 1. Make sure that the portions marked with dotted lines have no burrs.
2. The material of the actuator must be selected by considering the infrared permeability of the actuator.